SEGO CONFIGURATION I

SEGO MODULAR LIGHTBOX DISPLAY

PRODUCT CODE:SEGO-I-20x20G

On frame   On graphic

PRODUCT DESCRIPTION

The advanced technology of the new SEGO modular lightbox system combines innovation with intuition. Toolless down to its feet, SEGO is designed to help heighten your display experience. Magnetic electrical connectors light up the UL certified LED lights that come pre-installed in the profiles. Electrical wires stay hidden from view. Edge-to-edge customizable SEG backlit fabric graphics cover the front and back of the aluminum frame. Portable, configurable, desirable, SEGO is a lightbox unlike the others. SEGO is so well thought out, even its durable foam cut carry bag is made distinctly to keep all parts and pieces protected and organized. Configuration I features a storage room with door for easy access to items placed in the storage room.

DISPLAY DIMENSIONS	197"W x 88.25"H x 197"D
GRAPHIC SIZES	39.625"W x 88.625"H (SEGO-100X225)

GRAPHIC MATERIAL

Dye Sub Backlit Fabric

GRAPHIC FINISHING

Silicone beading sewn onto edge of graphic

DISPLAY CONSTRUCTION

Aluminum extrusion frame with plastic components

SHIPPING WEIGHTS & DIMENSIONS

|	
Shipping Weight (x13 boxes)	30 lbs (frame only) 32 lbs (frame & graphic)
Shipping Dimensions (each)	54.5"W x 15.5"H x 6.75"D

LED LIGHT SPECIFICATION	
BRAND	Osram
POWER	3W
CCT (COLOR TEMP)	6800k
AVERAGE BEAM ANGEL	20 °
LM/W	130
AVG LM/M^2	4800-5800
VOLTAGE INPUT	24V
TRANSFORMER SPECIFICATION	
POWER RATE 2 TRANSFORMERS	95W, 252W
CERTIFICATES	UL, CE, GEM
VOLTAGE INPUT	100-240V
VOLTAGE OUTPUT	24V

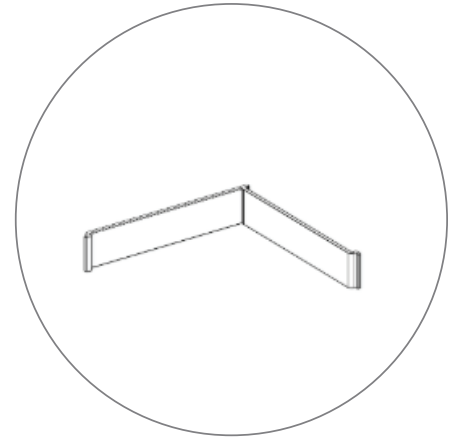| LUMENS (EACH FRAME)	
VOLTAGE (V)	24
POWER (W)	90
LM/W	130
TOTAL LM	11700
AVG LM	5850
CU	.8
EAV	4680
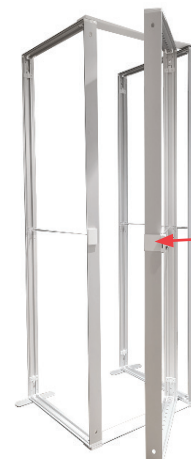
INCLUDES DOOR HINGE
WITH COMINATION LOCK

PARTS LIST

(qty 13)
SEGO-100X225X12
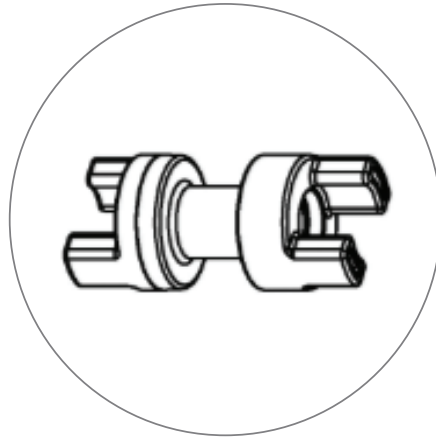
(qty 14)
SEGO-SCON

(qty 8)
SEGO-ILCON

(qty 5)
SEGO-5MWIRE
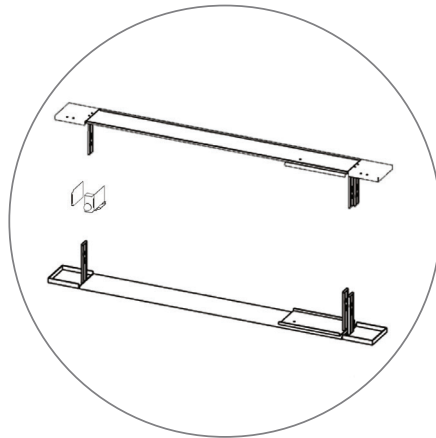
(qty 1)
SEGO-DOOR

SEGO Configuration H
Template Guide
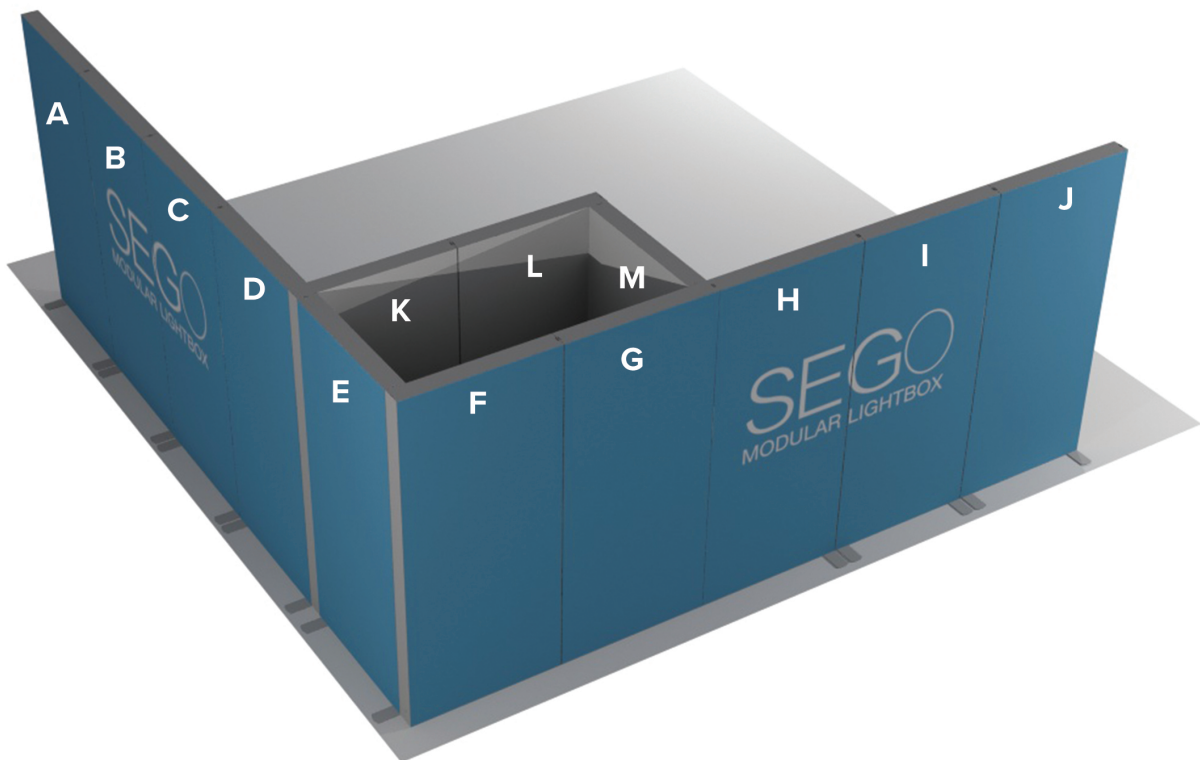
Frame	Template Dims	Notes
A	39.75" x 88.625"	-
B	39.75" x 88.625"	-
C	39.75" x 88.625"	-
D	39.75" x 88.625"	-
E	39.75" x 88.625"	Front graphic = blockout panel
F	39.75" x 88.625"	Front graphic = blockout panel
G	39.75" x 88.625"	Front graphic = blockout panel
H	39.75" x 88.625"	-
I	39.75" x 88.625"	-
J	39.75" x 88.625"	-
K	39.75" x 88.625"	Back graphic = blockout panel
L	39.75" x 88.625"	Back graphic = blockout panel
M	39.75" x 88.625"	Back graphic = blockout panel

SET UP INSTRUCTIONS

SEGO 100X225 FRAME ASSEMBLY
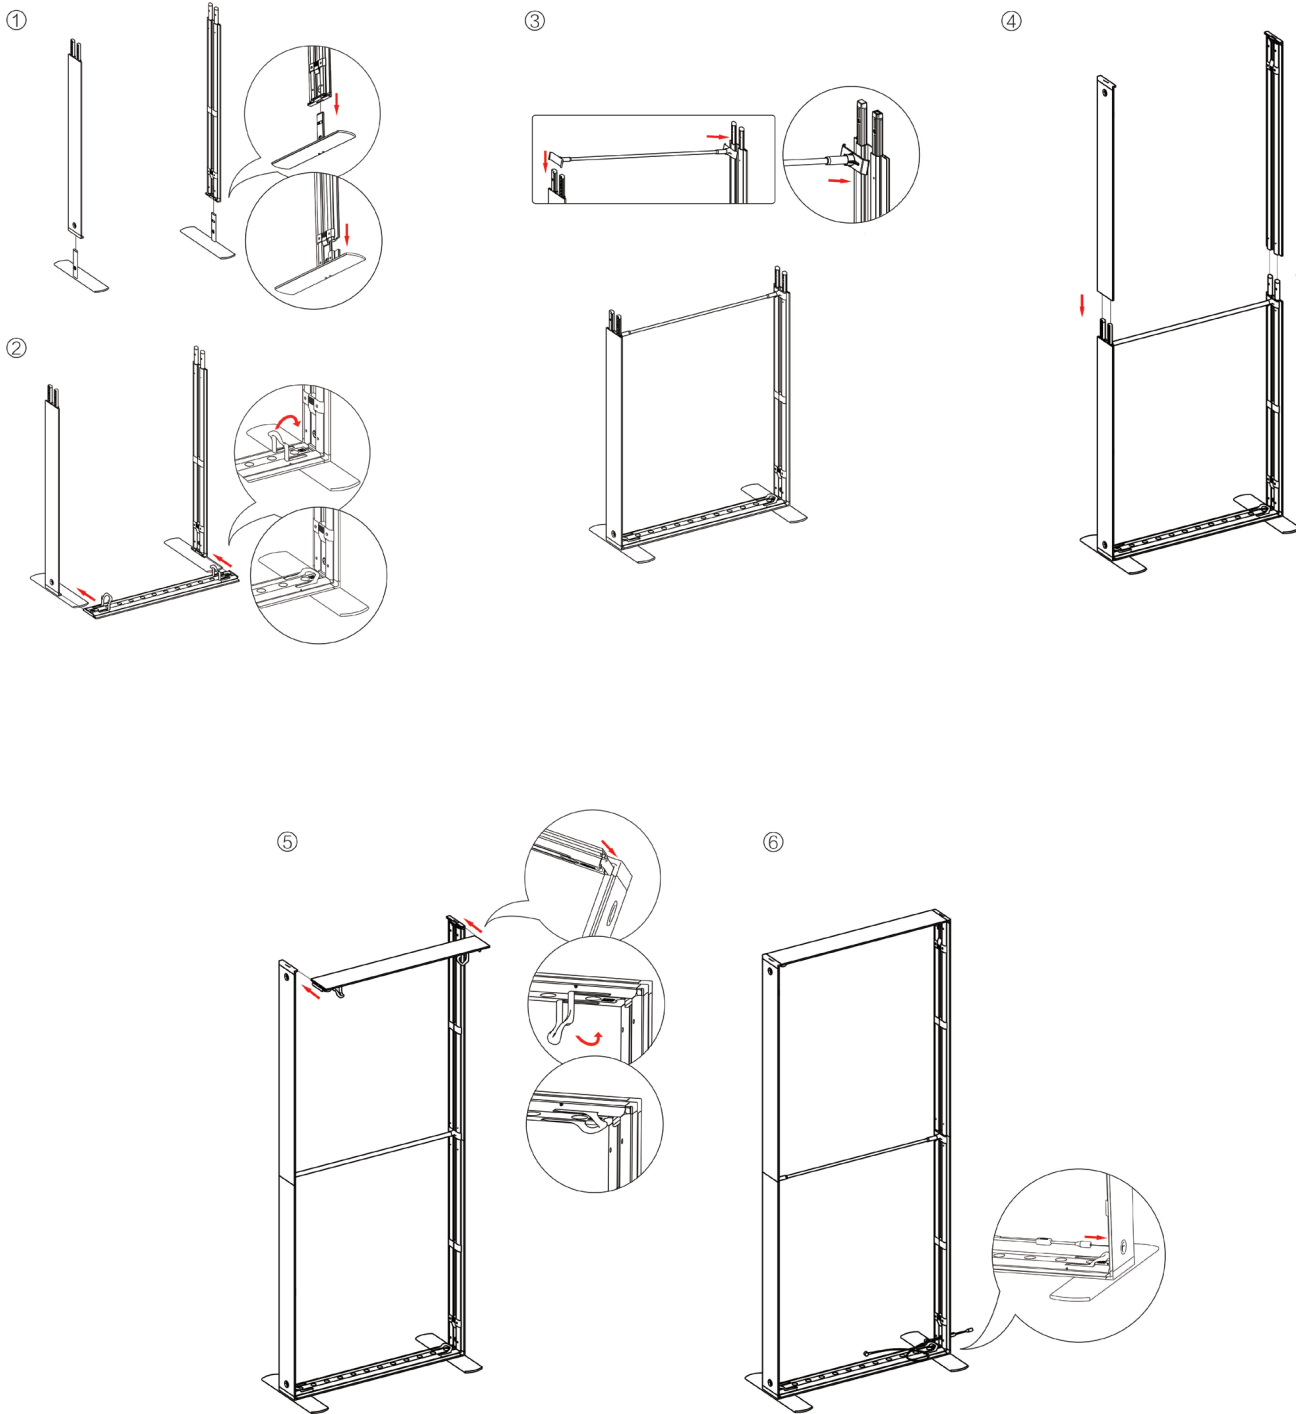
⑦

⑧

⑨

⑩
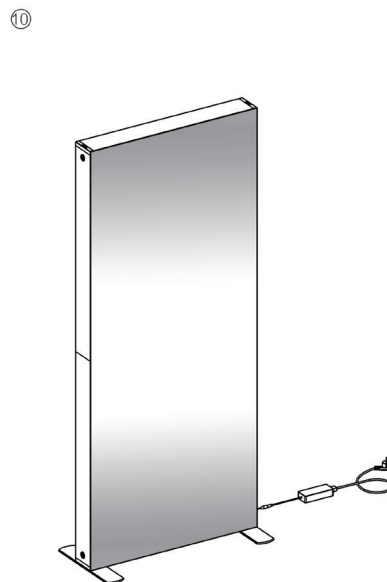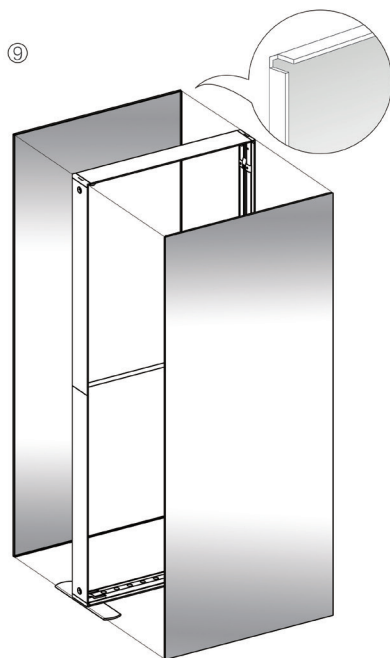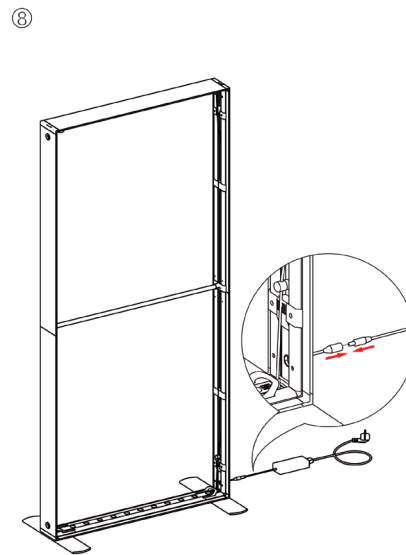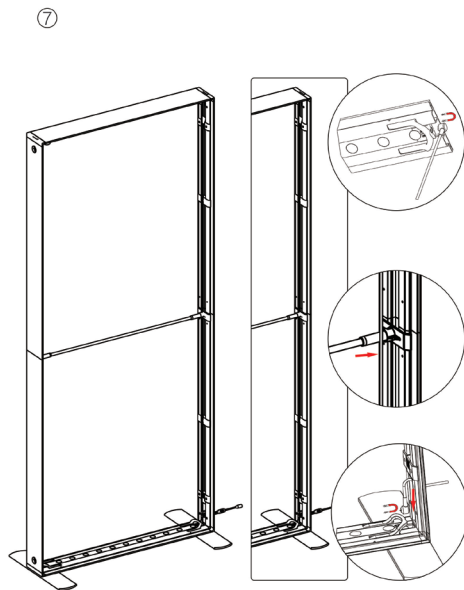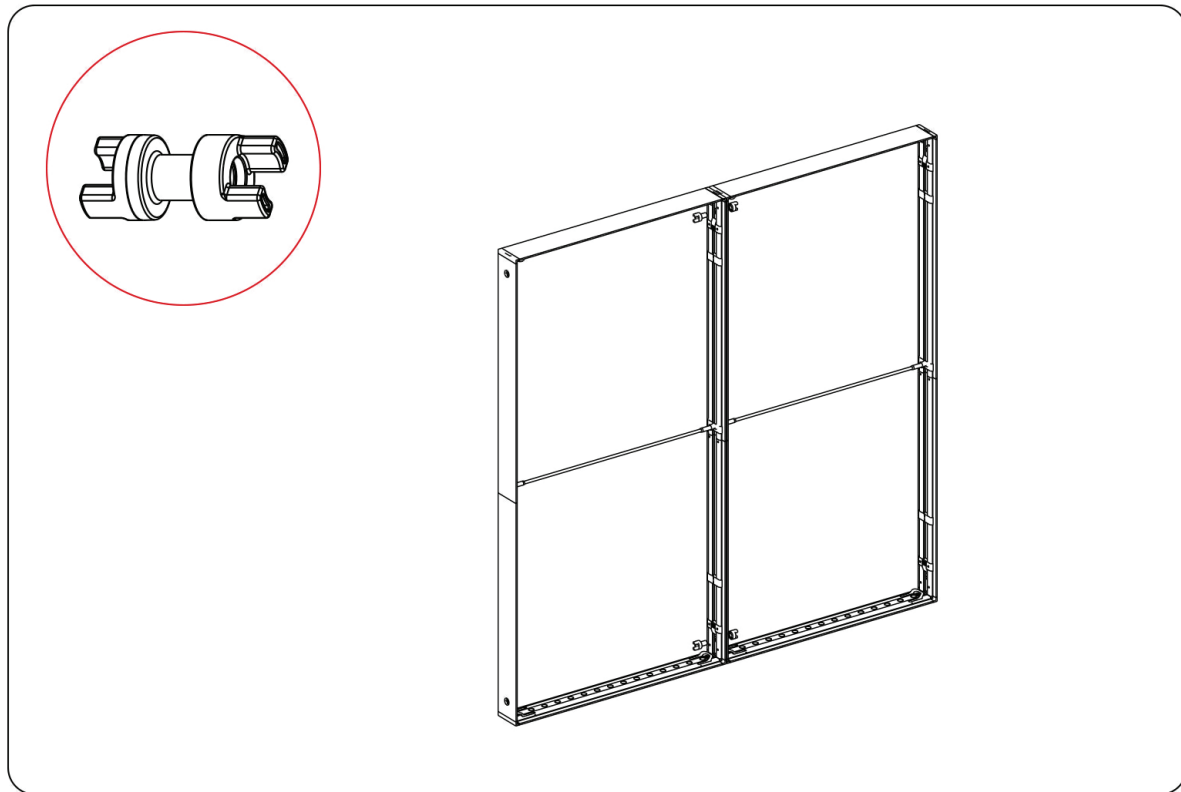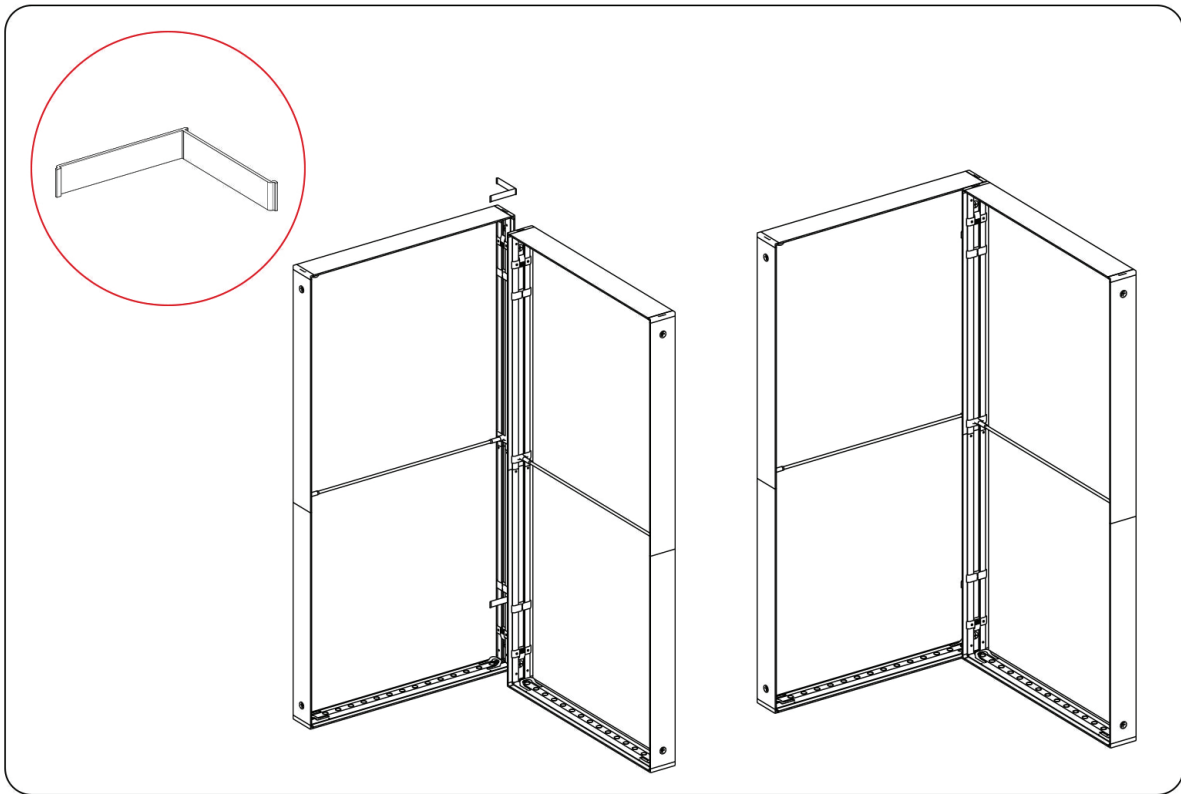
FRAME CONNECTION

DOOR HINGE CONNECTION

NOTE: HINGE IS ONLY COMPATIBLE WITH SEGO-100X225X12 FRAME

SEGO-100X225X12

INSTALL DOOR HINGE HERE

SEGO
MODULAR LIGHTBOX

TRANSFORMER WIRING CONNECTION

Frame A (5m Extension)

Frame B (5m Extension)

Frame C (5m Extension)

Frame D

Frame H

Frame I (5m Extension)

Frame J (5m Extension)

We recommend routing all wiring and transformers towards "room" made from frames E,F, G, K, L, & M
Reference diagrame above and legend to left on how to route wiring and when to use 5m extension wire